



Spanning-Tree Protocol

Malin Bornhager
Halmstad University




Objectives



- **Redundancy in a converged network**
- **Spanning-Tree Protocol (STP)**
- **STP Operation**
- **Extensions to STP**

Redundant Topologies


- Layer 2 redundancy improves the availability
- Implementing alternate paths by adding equipment and cabling
- Goal to eliminate network outages caused by a single point of failure
- All networks need redundancy for enhanced reliability

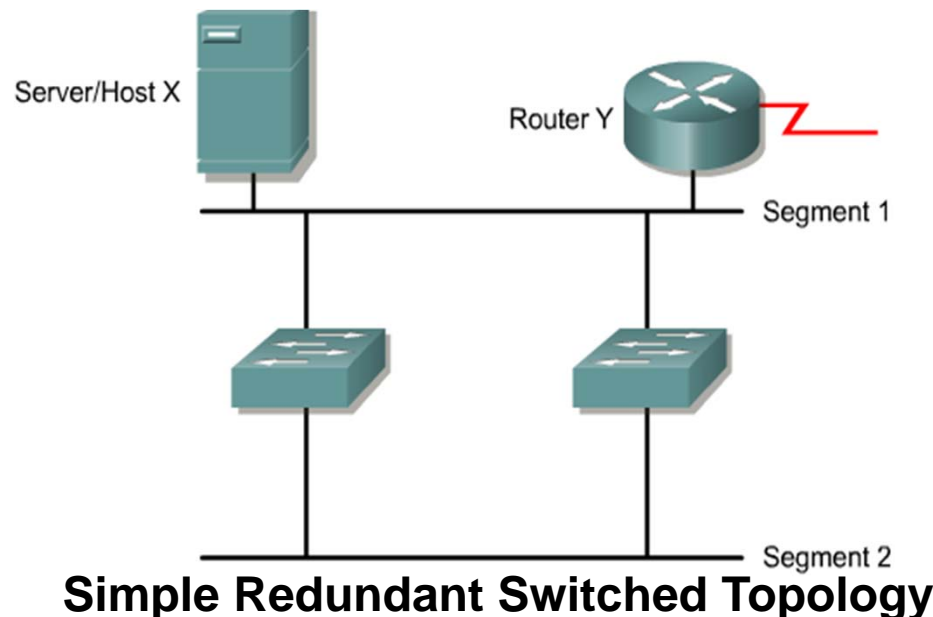

Issues with Redundancy


- **Layer 2 loops**
- **Broadcast storms**
- **Duplicate unicast frames**
- **MAC database instability**

Redundant Topologies

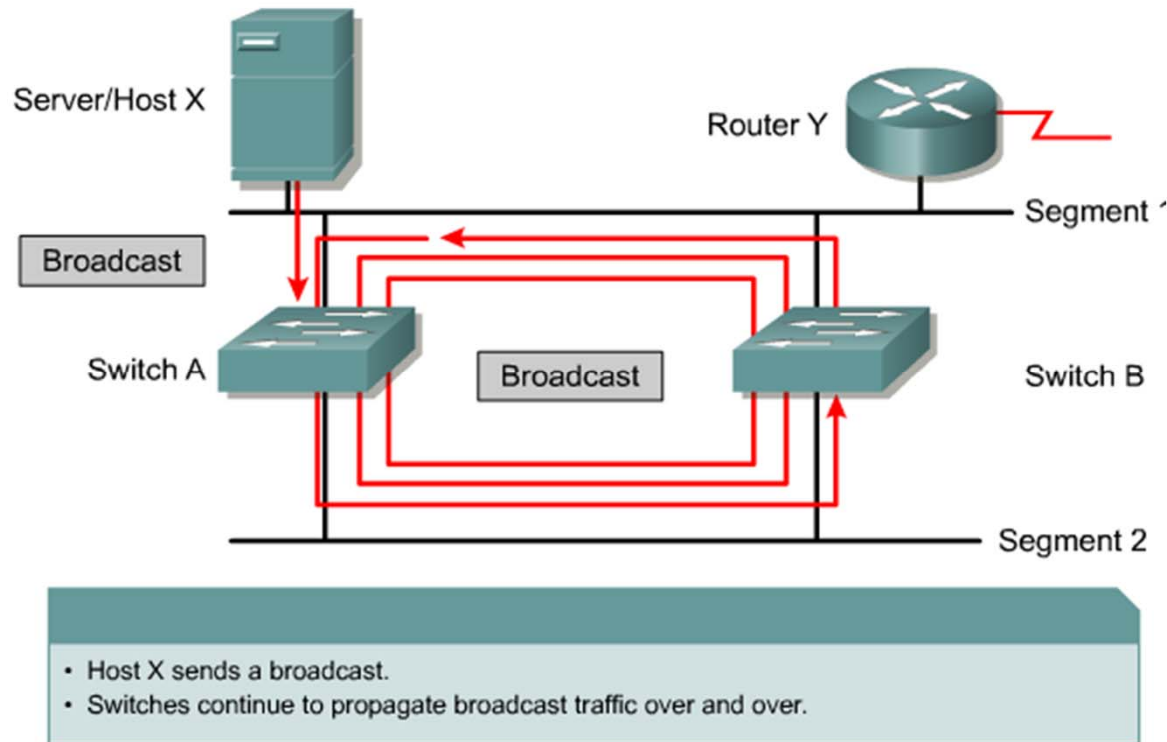

- Layer 2 loops
- Broadcast storm


Redundant Topologies

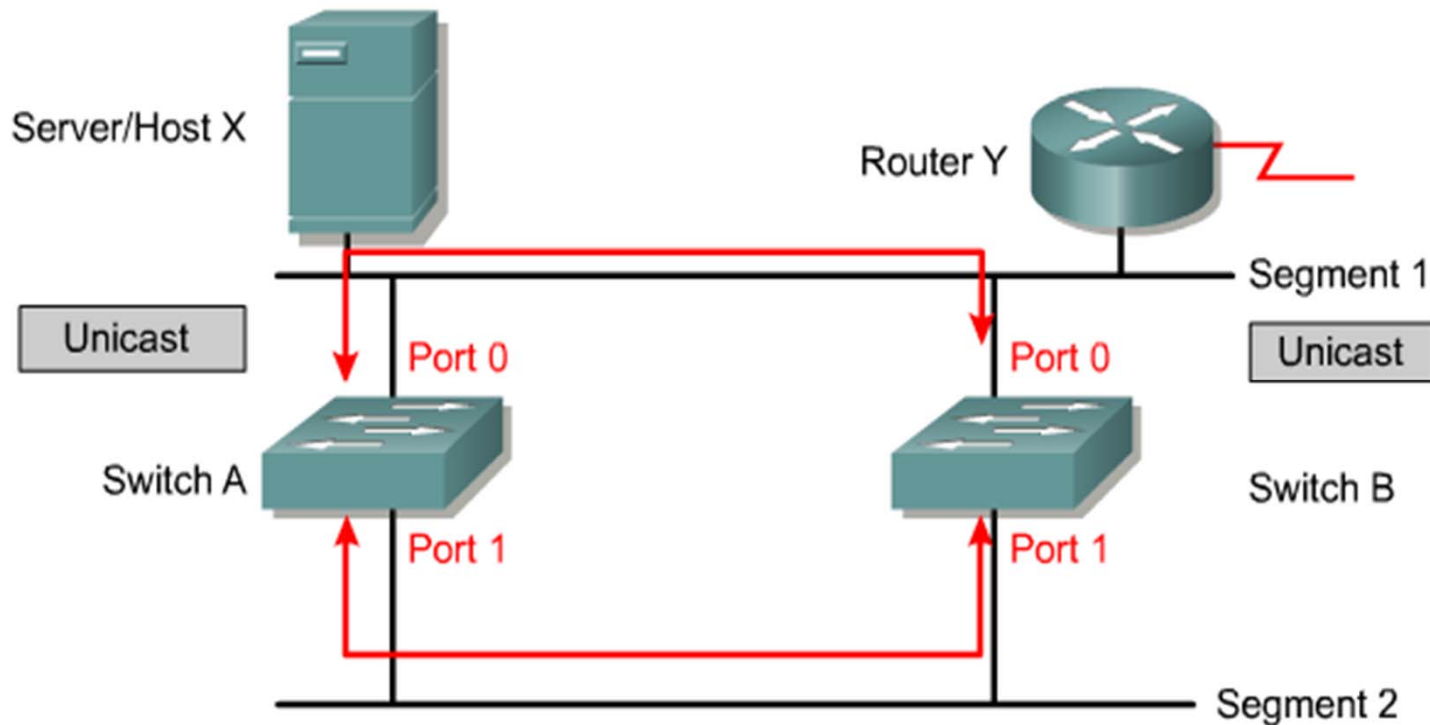

- **Duplicate unicast frames**
- **MAC Database Instability**

Spanning-Tree Protocol (STP)

- Can be used to reduce switching loops, but still have redundancy in the network

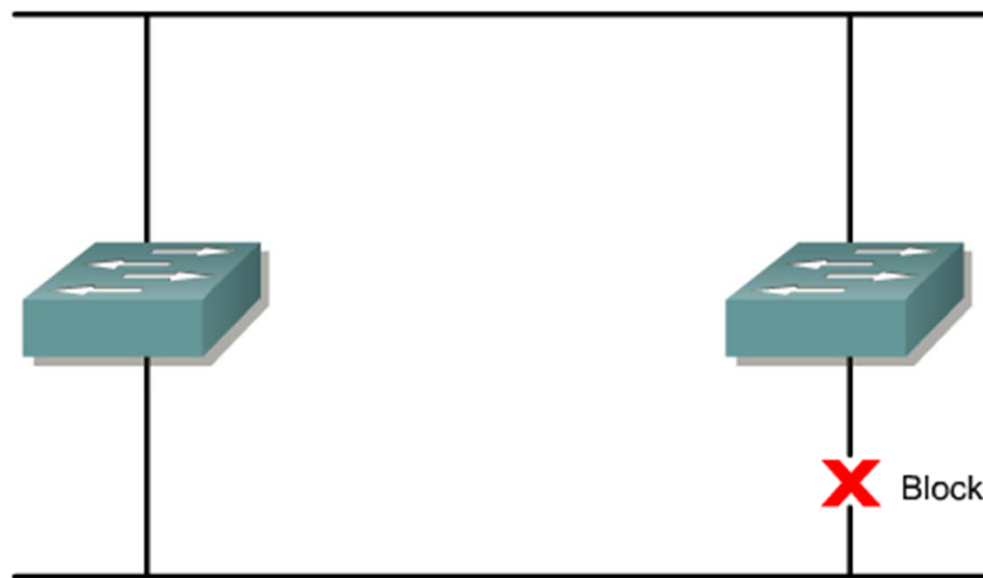

Provides a loop-free redundant network topology by placing certain ports in the blocking state.

STP Algorithm (STA)

- **Used to determine which switch ports needs to be blocked**
- **One single switch is elected as the root bridge, used as a reference point for the path calculations**
- **STA calculates the shortest path to the root bridge**
- **STA chooses the path with the lowest path cost, and the switch ports will be configured with different roles**

Port Roles


- **Root port**
 - **Switch port closest to the root bridge**
- **Designated port**
 - **All non-root ports that are still permitted to forward traffic**
- **Non-designated port**
 - **All ports configured to be in blocking state to prevent loops**

Spanning-Tree Operation

- **Electing a root bridge**
- **Selecting the root port on the non-root bridges**
- **Selecting the designated port on each segment**

How do the switches do this election?

Bridge PDU (Protocol Data Unit)

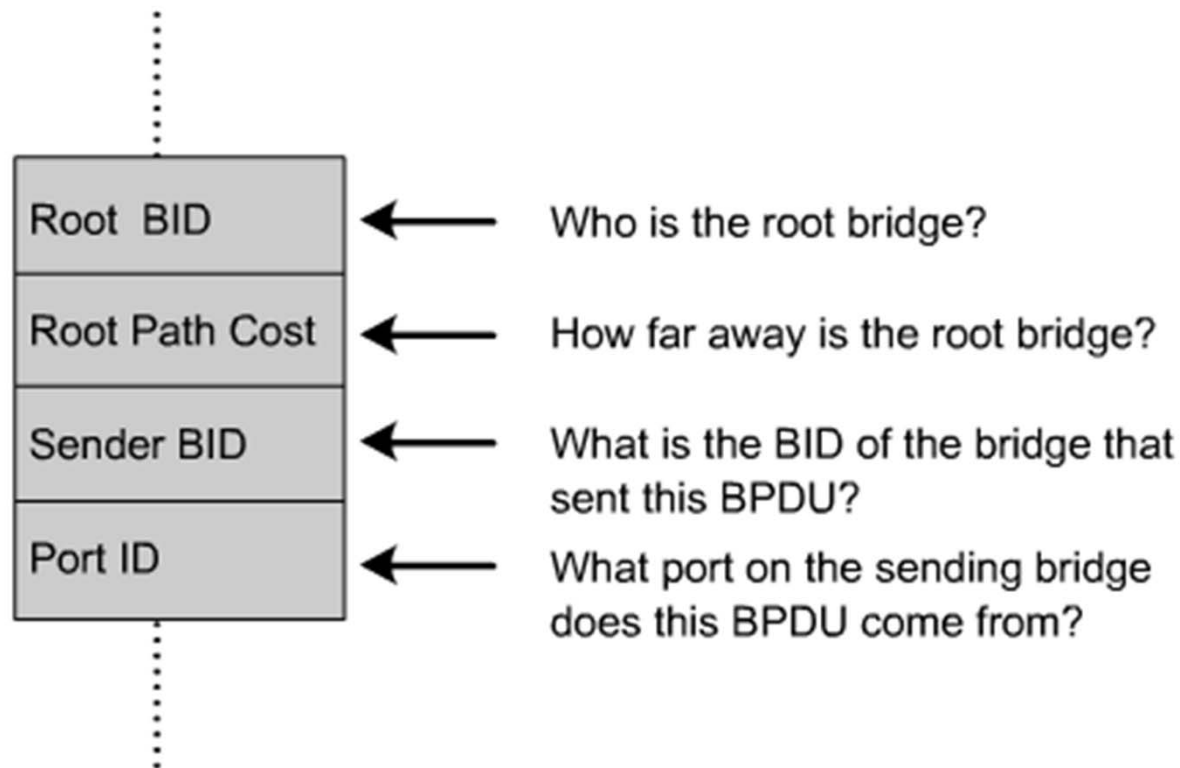


Each switch in the broadcast domain initially assumes that it is the root bridge

Bridge ID

- **Lower BID values are preferred**
- **Default priority = 32768**

Bridge IDs

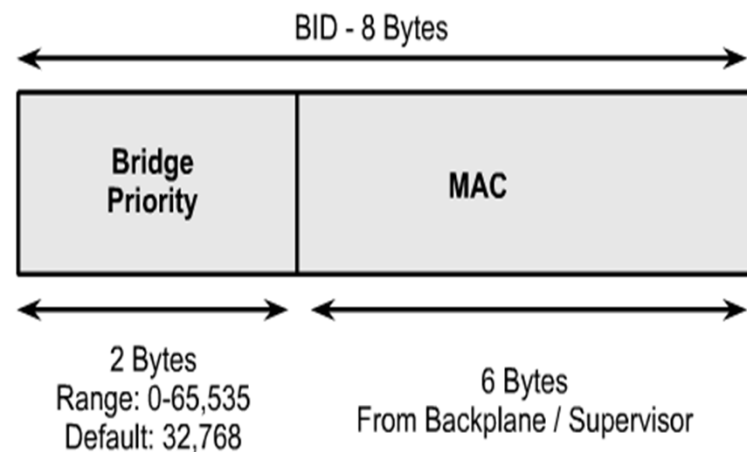


BPDU Process


- **Electing a root bridge**
 - BPDUs are sent in the broadcast domain
 - Compare Bridge IDs
- **One root port is elected on each switch**
 - Compares the path costs on all switch ports
 - Lowest overall path cost to the root is automatically assigned the root port role
- **Assign designated and non-designated ports**
 - All switch ports in the root bridge will be designated
 - Two switches connected to the same segment sends BPDUs, and the lowest will become designated

Spanning-Tree Operation

- One Root Bridge per network
- One Root Port per non-root bridge
- One Designated port per segment
- Non-designated ports are unused

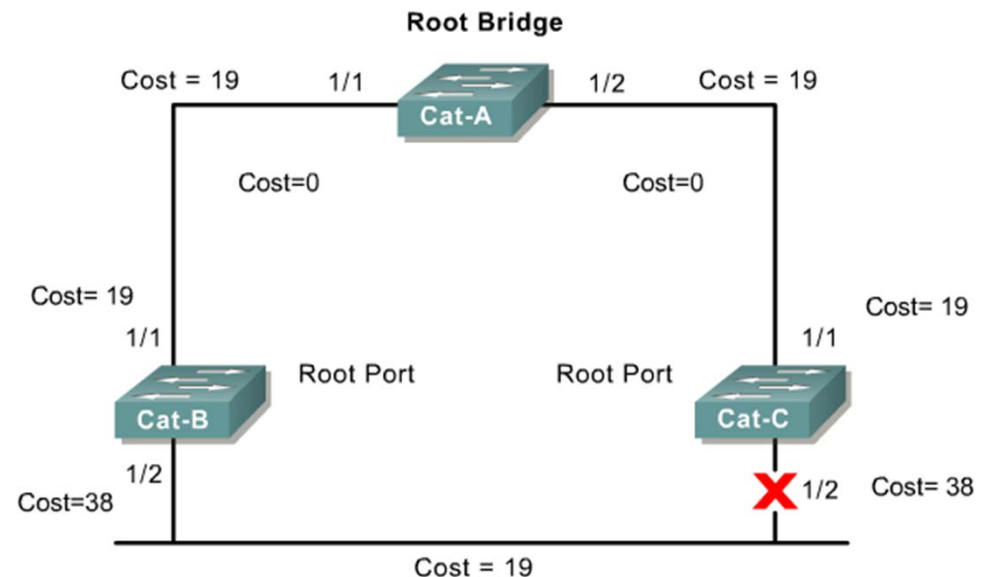


Spanning-Tree Operation

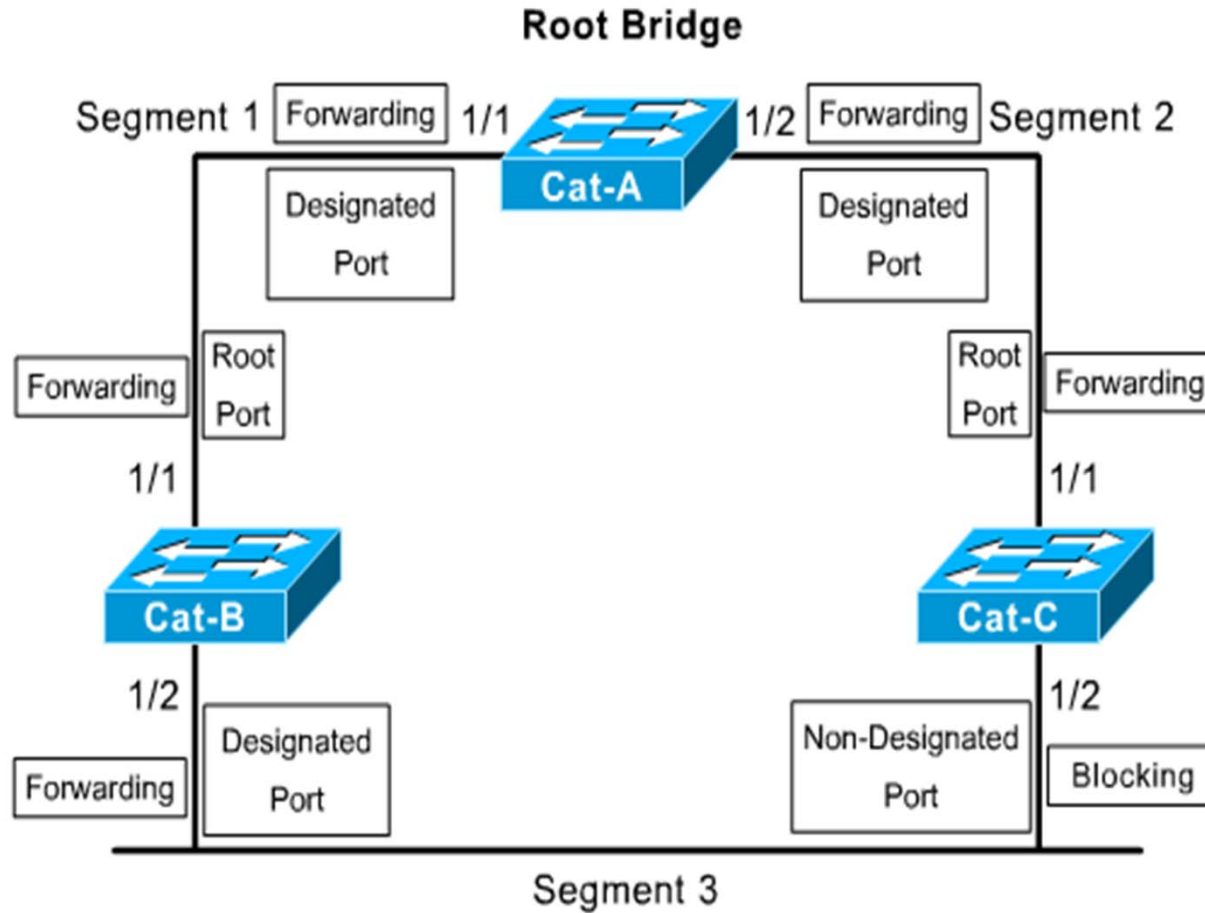

Spanning-Tree Port States

State	Purpose
Forwarding	Sending / receiving user data
Learning	Building bridging table
Listening	Building "active" topology
Blocking	Receives BPDUs only
Disabled	Administratively down

Spanning-Tree Port States

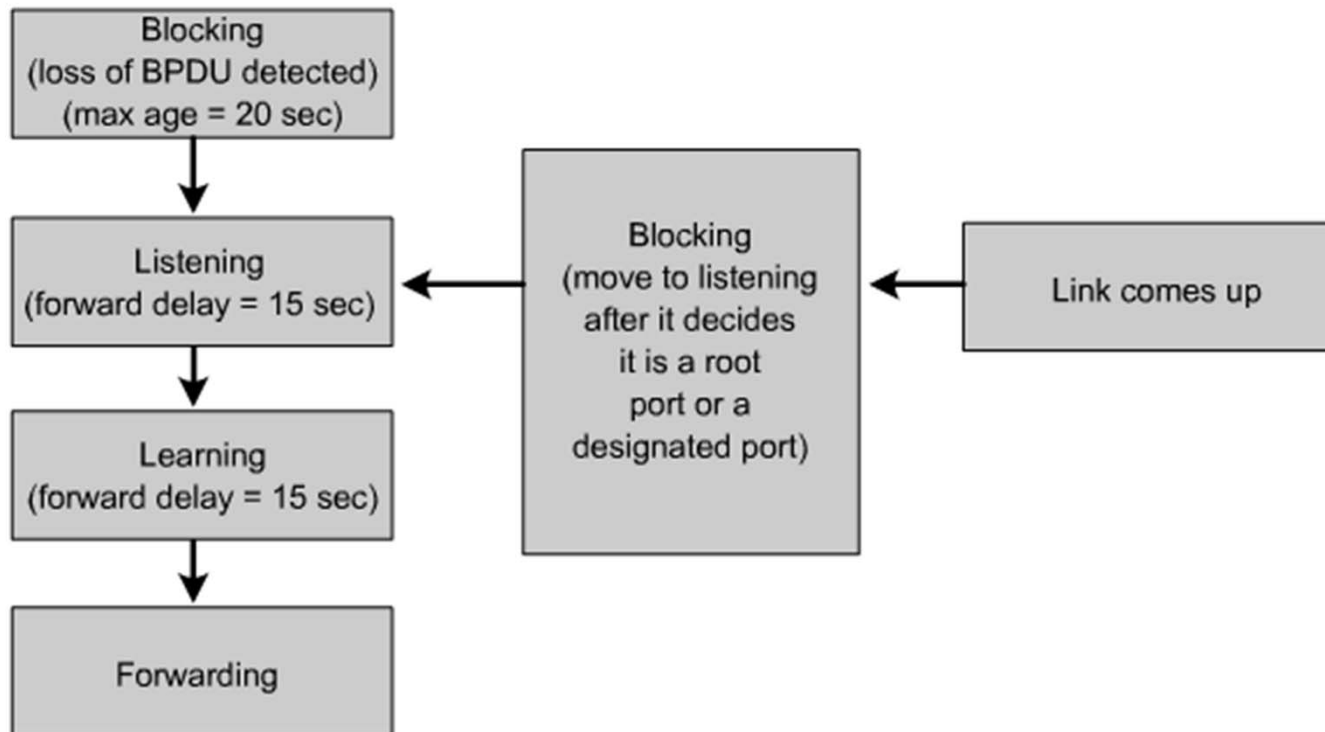

Spanning tree transits each port through several different states.

PortFast technology

- **Cisco technology**
- **The port transitions from blocking to forwarding state immediately, bypassing the listening and learning states**
- **The purpose is to minimize the time that access ports must wait for spanning-tree to converge**
- **Can only be used on access ports connected to a single workstation or server, otherwise a loop can be created**

Cisco Proprietary Extensions of STP

- **Per-VLAN Spanning-Tree Protocol (PVST)**
 - Maintains a spanning-tree instance for each VLAN configured in the network
 - Uses ISL trunking protocol
- **PVST+**
 - Same as PVST, but supports IEEE 802.1Q trunking
- **Rapid PVST+**
 - Faster convergence than STP

IEEE Standard Extensions of STP

- **Rapid STP (RSTP)**
 - Provides faster convergence after a topology change
 - Redefines the port states, and an alternate or backup port can immediately change to forwarding port
- **Multiple STP (MSTP)**
 - Multiple VLANs can be mapped to the same spanning-tree instance
 - Reduces the number of instances needed to support a large number of VLANs

Troubleshoot a Failure

To troubleshoot a bridging loop, you need to know:

- **The topology of the bridge network**
- **The location of the root bridge**
- **The location of the blocked ports and the redundant links**