




ACCORD CO., LTD.



AK-804-A-BBW

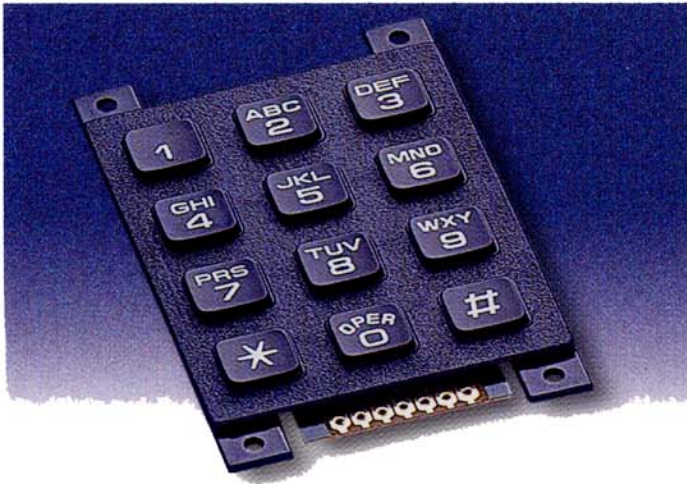


AK-804-N-WWB

GENERAL SPECIFICATION

- Contact rating: 20mA, 24VDC
- Contact resistance: 200 ohm max
- Life: 1,000,000 cycles per key
- Operating Temperature: -20°C to +60°C
- Storage Temperature: -40°C to +65°C



STANDARD MATRIX CIRCUIT DIAGRAM

CIRCUIT DIAGRAM



AK-804

OUTPUT ARRANGEMENT	
OUTPUT PIN NO.	SYMBOL
1	COL 2
2	ROW 1
3	COL 1
4	ROW 4
5	COL 3
6	ROW 3
7	ROW 2

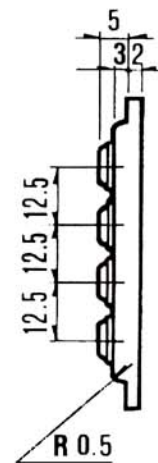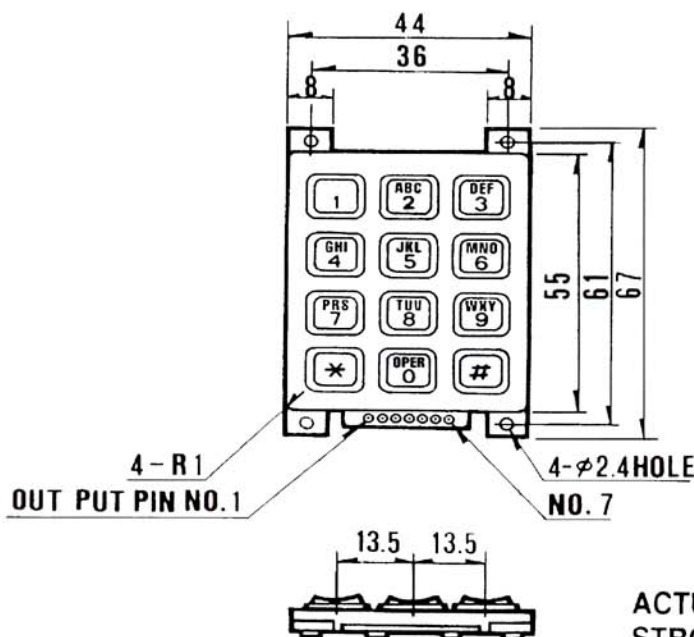

ACTUATING FORCE: 100 ± 30 GRAMS.
STROKE: 1.0 ± 0.2mm

ACCORD CO., LTD.

8th Fl., No. 398, Jen Ai Road, Sec. 4, Taipei, Taiwan.
Tel: 886-2-2704-4503
Fax: 886-2-2703-6358
E-mail: accordia@ms4.hinet.net
<http://www.accordia.com.tw>